



No ROHS hazardous material

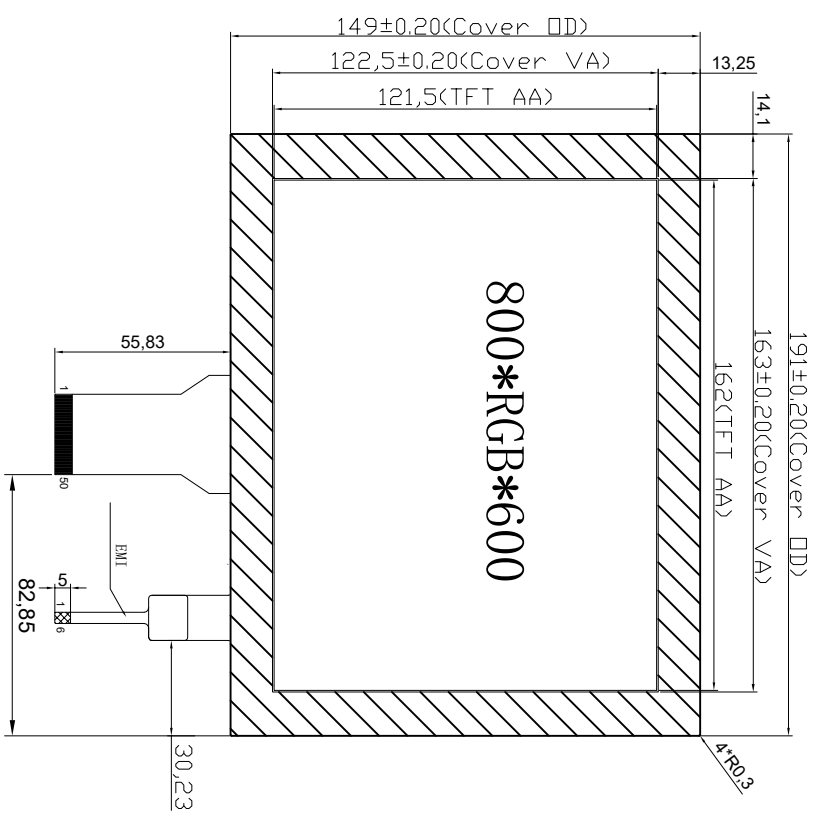


Screen printing area: Print Black

Front view

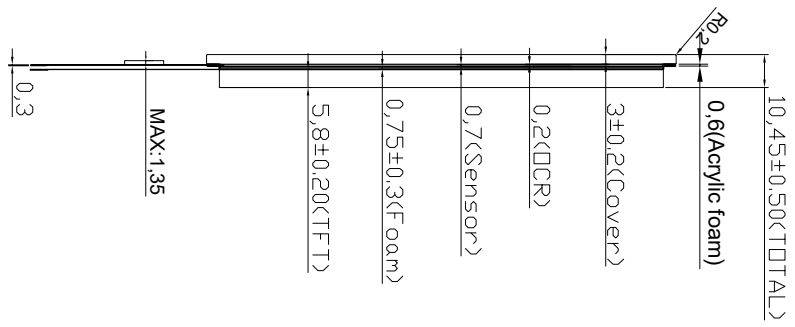

Side view

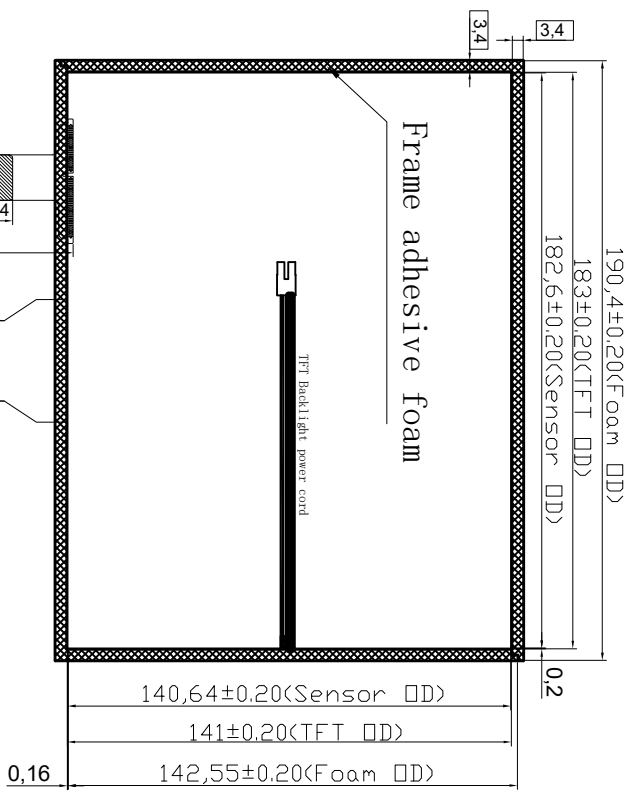

Frame adhesive foam area = 0.6mm

Back view

TP	PIN:
1	INT 3.3V
2	VDD 3.3V
3	SCL 3.3V
4	SDA 3.3V

Technical parameters

1. Interfaces:	12C	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	CYMA568	9. Surface hardness:	≥6H
4. Impact resistance:	86.00mm, Steel ball 500g/100次/0.5m/Time	10. Operate :	-20°C~+70°C, ≤85%RH
5. Touch points:	5 points	11. Storage :	-30°C~+80°C, ≤85%RH
6. Power supply:	3.3V	12. Unmarked dimension tolerance	as±0.2

TFT:HX080NA-06A-33B

1	2	3	4	5	6	7	8	9	10
1C	NC	NC	NC	GND	VCOM	VCC	MODE	DE	VS
11	12	13	14	15	16	17	18	19	20
HS	B7	B6	B5	B4	B3	B2	B1	B0	G7
21	22	23	24	25	26	27	28	29	30
G6	G5	G4	G3	G2	G1	G0	R7	R6	R5
31	32	33	34	35	36	37	38	39	40
R4	R3	R2	R1	R0	GND	DCLK	GND	L/R	U/D
41	42	43	44	45	46	47	48	49	50
VGH	VEL	AVDD	RESET	NC	VCOM	DITHB	GND	NC	NC



杭州宏毅科技有限公司  
Grahwolet Technology CO., Ltd

Model HX0801809

Version	Designer	Date	View direction	Unit
V1.0	LU0	2018-4-03		MM
Customer	Approved	Date		MM

Ordinal	Modify content description	Cartographer	Date of change
①			