

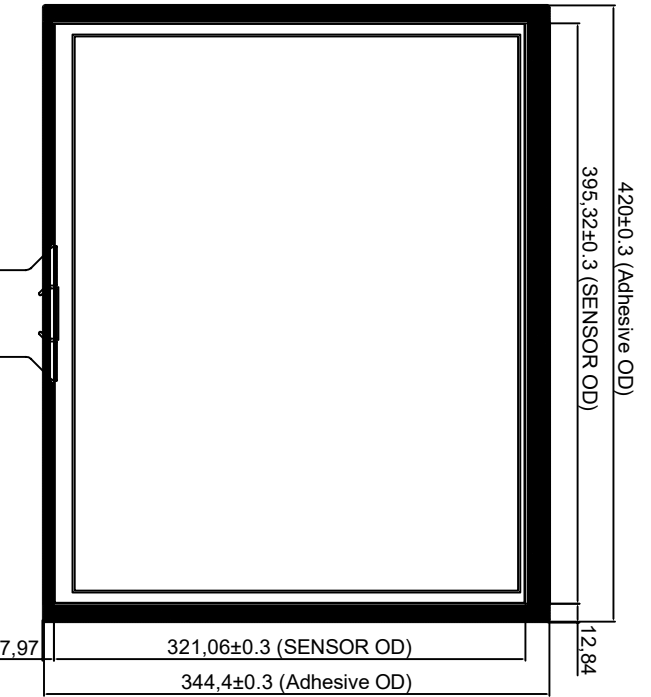
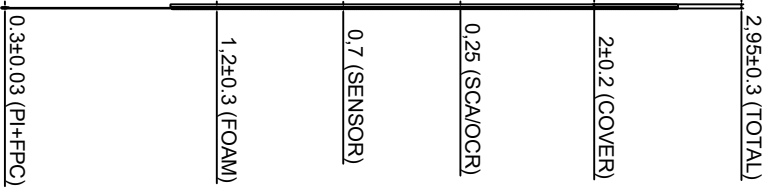


No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
Δ			
Δ			

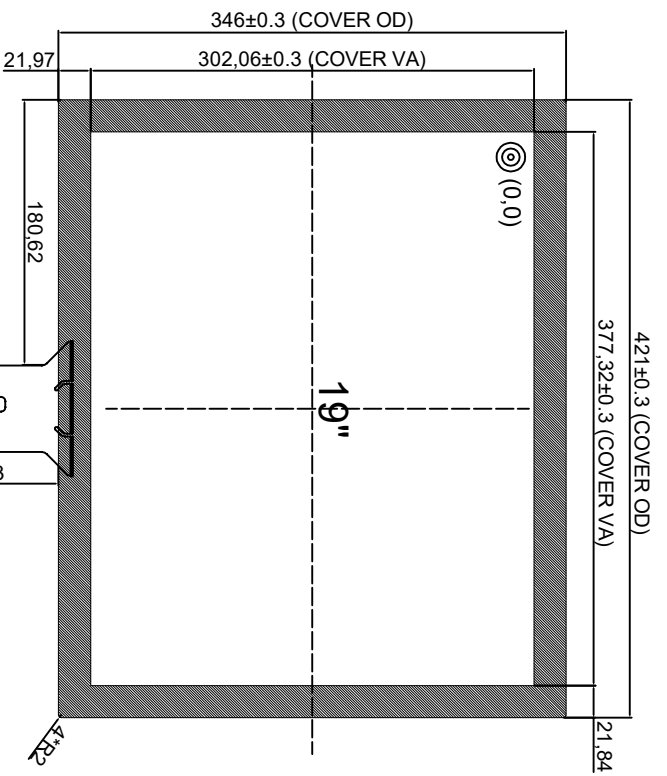

USB Connector (J1)

1	VCC(5V)
2	DN
3	DP
4	GND

Cover: Print Black

Foam:3M(VHB)=1.2MM

Front view

Side view

Back view

TP Technical parameters

1.Interfaces	USB/ITC	7.Humidity range	45~85%RH
2.Structure	G+G	8.Transmittance	≥85%
3.IC solutions	ILI2510	9.Hardness	≥6H
4.Impact	30,000J/s,Standard I /132g/dft=18t=35cm/Time	10. Operate	-20℃~+70℃, ≤85%RH
5.Touch points	10 points	11. Storage	-30℃~+80℃, ≤85%RH
6.Power supply	5V (USB) 3.3V (IIC)	12.Unmarked dimension tolerance	as±0.5

IIC PIN

1	VDD
2	GND
3	SDA
4	SCL
5	INT
6	RST



杭州宏梟科技有限公司
GraHowlet Technology CO., Ltd

Model	HX1901805		view direction		Unit	MM	
Version	V1.0	Designer	LU0	Date	2020-11-01	Edition	A1
Customer		Approved		Date		Proportion	1:1